

A-11A

FIG. 2


ESTIMATED PARTIAL AFTERBURNING
PERFORMANCE

GE J-93-5 ENGINE

JR150 IN PRIMARY; HEF IN A/B

M = 3.20

PERCENT MAX. S.F.C. AT MAX. THRUST

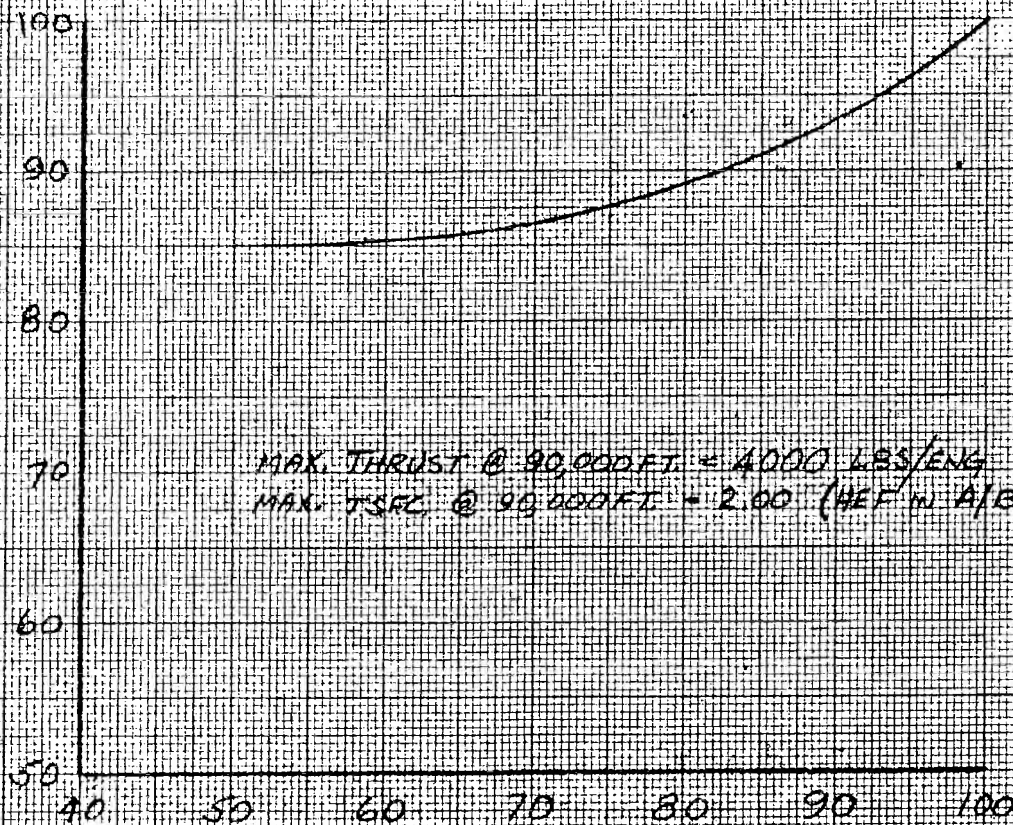

MAX. THRUST @ 90,000 FT. = 4000 LBS/ENG
MAX. TSFC @ 90,000 FT. = 2.00 (HEF IN A/B ONLY)

PERCENT MAX. THRUST

Job #89B00980R
Box #4 Folder 59

FIG. 2